




ZTN – Pumps For Heat Transfer Oil

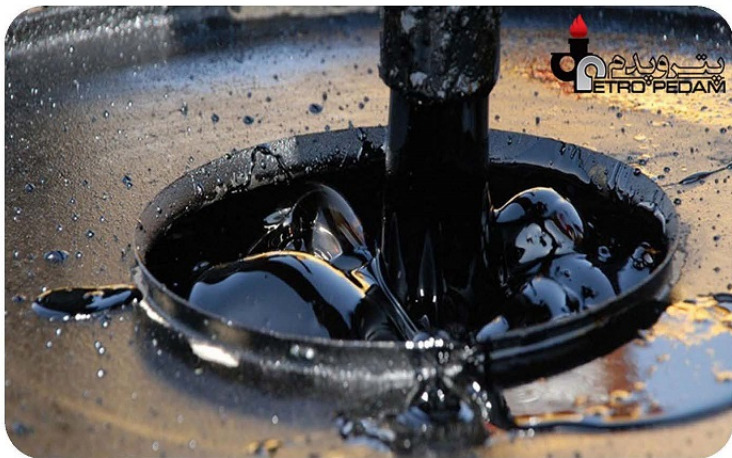

These pumps are applied in, but not limited to the following industrial sectors:


- Chemical industry
- Paper industry
- Food industry
- Laundries
- Rubber & Plastic industry
- Asphalt industry

ZTN Hot Oil Pumps: The Solution For Critical Duties:



PETROPEDAM is a pump manufacturer since 1999.

In contrast to water, organic or synthetic heat transfer liquids offer the capability to heat or cool without high system pressures. Maximum operating temperatures up to 350 °C.

$n=2900 \text{ 1/m}$




$n=1450 \text{ 1/m}$

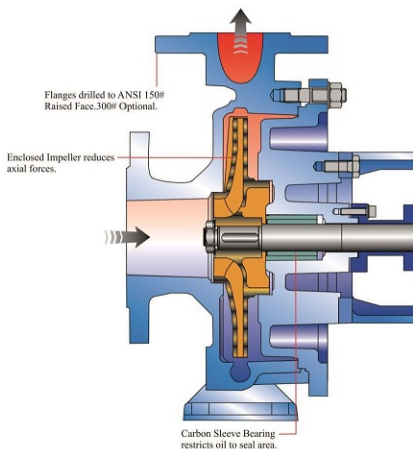

Technical data:

Output:	max. 500 m ³ /h
Delivery head:	max. 95 m
Speed:	max. 2900 rpm
Temperature:	max. 350 °C

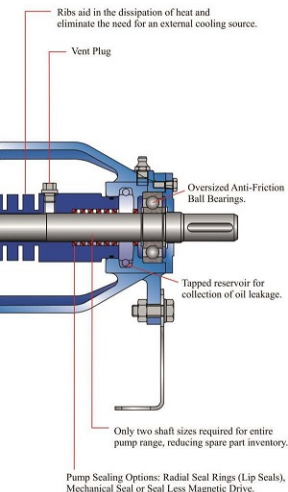

ZTN Thermal Oil Pumps:

The ZTN Series has been developed for handling thermal oil up to 350 °C in the heat engineering industry. The increased demands on operational safety, environmental protection and the reduction in running expenses have consequently been considered in this design.

All pressure-loaded components are constructed out of ductile iron. The extensive range of available sizes make it possible to select the right pump for any application at an affordable cost, not only of the pump but the cost of operation as well.


The ribbed design of the seal housing unit, in addition to controlling the flow of pumpage to the seal area, allows heat to be effectively dissipated from the pumpage before that heat reaches critical wear components; the Radial Seal Rings or Mechanical Seal and ball bearings. These components therefore can operate without external cooling.

Standard TEFC motors are used with the ZTN pumps without the need for an additional fan mounted cooling fan.

The pump is fitted with a thermally isolated bearing carrier and a sliding sealing housing that can accommodate thermal expansion, thus preventing distortion and misalignment between the pump and coupling.

Back Pull Out

The back pull out design allows the disassembly of the complete rotating assembly without removing the pump casing from the pipe system.



Pump Design Dissipates heat away from seals and bearings with no external cooling.



Providing Solutions
..... Achieving Results



Factory:

Address: Golbon 12th St. Baustan Blvd. Shamsabad
Industrial zone, after IKA, Tehran-Qam Highway.
Tehran – Iran.
Tel: +98 21 562322020 – 56233066/7
www.petropedam.com

Main office:

Address: first floor, No 1, Sadaf Alley , Dardman Blvd,
Shahrak Gharb ,
Tehran, Iran
Tel / Fax: +98 21 88086883 / 88086891
info@petropedam.com